

## Wheel lifter for cars, vans and 4WD



WD 60



Capacity: 60 kg. (Outside diameter max. 820 mm.)



Effortless foot operated lifting.



No heavy, manual lifting.  
The wheel lifter lifts the wheels straight from the floor.






Compac's wheel lifter is an ergonomic solution for easy and safe demounting, handling and mounting of aluminium wheels with low profile tyres up to 24".



Rollers with ball bearings for easy rotation and positioning.

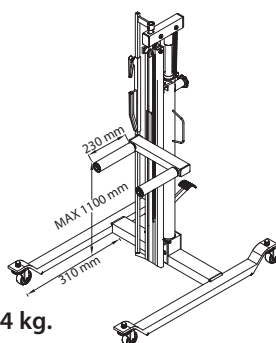

Weight: 64 kg.

Easy access to wheel bolts. The wheel is positioned away from the main piston.



## Wheel dollies for trucks and buses

Easy and safe mounting, demounting and handling of heavy wheels for trucks and buses. Ideal for service trucks.

*Ergonomical handle makes the wheel dolly easily controllable by just one mechanic.*

### WD Mobile

Capacity 250 kg.

*Rollers with ball bearings for easy rotation and positioning of wheels onto hubs.*



Capable of handling wheels up to large 445/65 - 22,5".




The rollers have three positions each side for different wheels sizes.



Spring loaded support for fast and easy storing.

Weight: 15 kg.

Extra support wheels for easy and safe manoeuvring even when fully loaded.

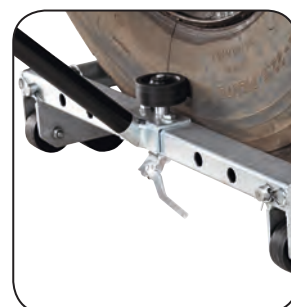



## Wheel dollies for trucks and buses

**Ideal for handling large, heavy wheels  
on trucks, buses and vans.**

# WD 800



*Capacity 800 kg.*

*Max. lifting height 665 mm.*

*Dual rollers fitted with bearings for separate rotation and positioning of wheels.*




**Sliding arms.**  
Enables handling of  
wheels with diameter  
from Ø 545 mm - 1278 mm.



**Position of cylinder provides clear access to operating area through the open frame.**



**Ideal for lifting  
heavy twin wheels.**

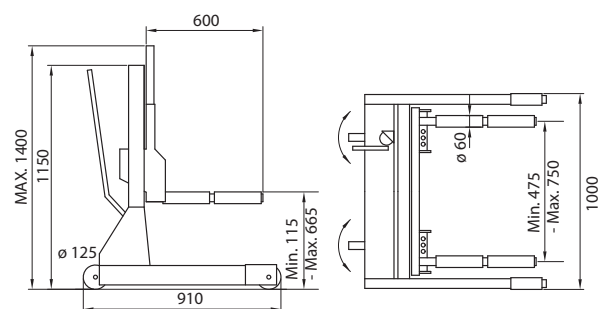

**Weight: 136 kg.**


## Wheel dolly for agricultural and earth moving machinery

Easy and safe mounting, demounting and handling of large wheels on agricultural and earth moving machinery.

### WD 1500



Double acting hydraulic system. Hands-free switch between lifting and lowering action. Safe and controlled lowering.

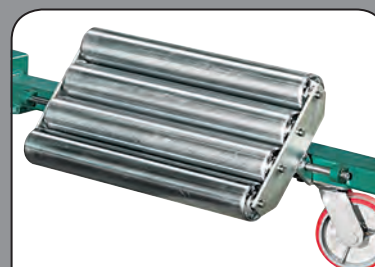

2 x 4 large rollers improve handling of tyres with deep treads.



**Mobile:** Easy to use outside the workshop. Disassembled in a few seconds.







Keyword:  
Compac WD 1500



Large open working area, due to the built-in hydraulic.



Capable of handling large wheels from 1150 mm up to 2150 mm in diameter and up to 1050 mm in depth.

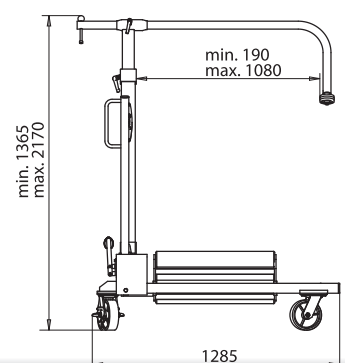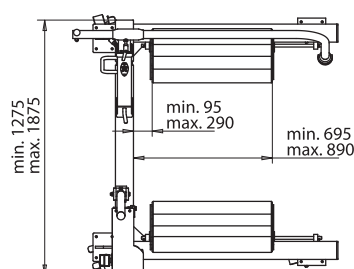

Weight: 156 kg.